

14x65mm photovoltaic fuses — 1500/1300Vdc, 2.25-32A



Catalog symbols:

- PV-(amp)A14LF (cylindrical)
- PV-(amp)A14L-T (cylindrical with tags)
- PV-(amp)A14LF10F (cylindrical with 10mm fixings)

Description:

Eaton's Bussmann™ series of 14x65mm package PV fuses are specifically designed for protecting and isolating photovoltaic strings. These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Available with three mounting styles for application flexibility.

Basic fuse size

- 14x65 mm

Ratings

- Volts
 - 1500 Vdc (2.25-20 A)
 - 1300 Vdc (25-32 A)
- Amps 2.25-32 A
- Interrupting rating 10 kA
- Time constant 1-3ms

Operating class

- gPV and UL PV fuse links

Agency information

- UL® Listed 248-19
- IEC® 60269-6 gPV
- CSA® pending
- CCC® pending
- RoHS compliant

Packaging (carton quantity):

- PV-(amp)A14LF, PV-(amp)A14L-T, PV-(amp)A14LF10F: 10

Technical data

PV fuse coordination with thin film cells, and 4", 5" and 6" crystalline silicon cells.

Features:

- Specifically designed to provide fast-acting protection under low fault current conditions associated with PV systems
- High DC voltage rating
- Variety of mounting options for flexibility
- Demonstrated performance in extreme temperature cycling conditions
- Wide range of available amp ratings makes it easy to standardize wire harness protection
- Fuses meet UL and IEC photovoltaic standards for global product acceptance
- Low watts loss for greater PV system efficiency
- Low heat rise permits more precise sizing for greater electrical protection

Typical applications:


- Combiner boxes
- Inverters
- PV wire harnesses

Specifications:


Catalog numbers / configurations			Current rating (amps)	Voltage rating (Vdc)	Energy integrals I ² t (A ² s)		Watts loss	
Cylindrical	Cylindrical with tags	Cylindrical with 10mm fixings			Pre-arcing	Total at rated voltage	0.8 I _n	I _n
PV-2.25A14LF	PV-2.25A14L-T	PV-2.25A14LF10F	2.25	1500	4	8	1.4	2.3
PV-2.5A14LF	PV-2.5A14L-T	PV-2.5A14LF10F	2.5	1500	5	10	1.5	2.5
PV-3A14LF	PV-3A14L-T	PV-3A14LF10F	3.0	1500	8	14	1.7	2.8
PV-3.5A14LF	PV-3.5A14L-T	PV-3.5A14LF10F	3.5	1500	12	23	1.8	3.0
PV-4A14LF	PV-4A14L-T	PV-4A14LF10F	4.0	1500	18	34	2.0	3.3
PV-15A14LF	PV-15A14L-T	PV-15A14LF10F	15	1500	14	160	3.2	5.8
PV-20A14LF	PV-20A14L-T	PV-20A14LF10F	20	1500	34	400	3.8	6.9
PV-25A14LF	PV-25A14L-T	PV-25A14LF10F	25	1300	65	550	4.1	7.5
PV-32A14LF	PV-32A14L-T	PV-32A14LF10F	32	1300	105	900	5.7	10.4

Dimensions/configurations - mm:


Cylindrical PV-(amp)A14LF

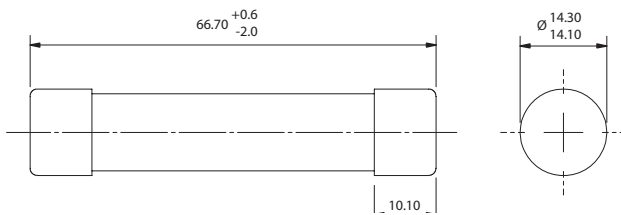


Cylindrical with 10mm fixings PV-(amp)A14LF10F

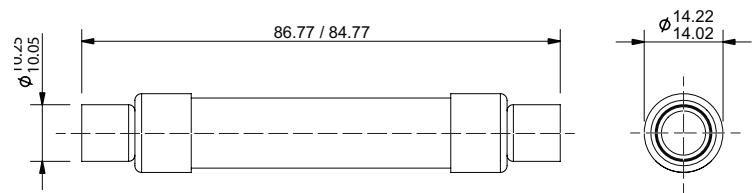

Cylindrical with tags PV-(amp)A14L-T

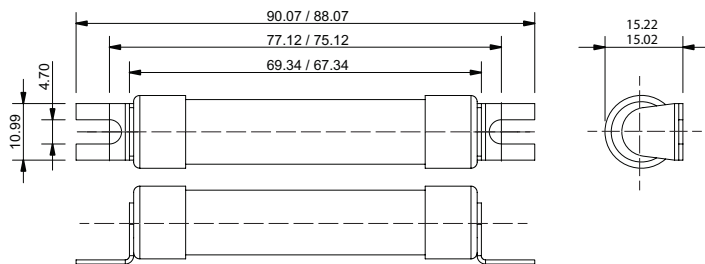

Time-current characteristics

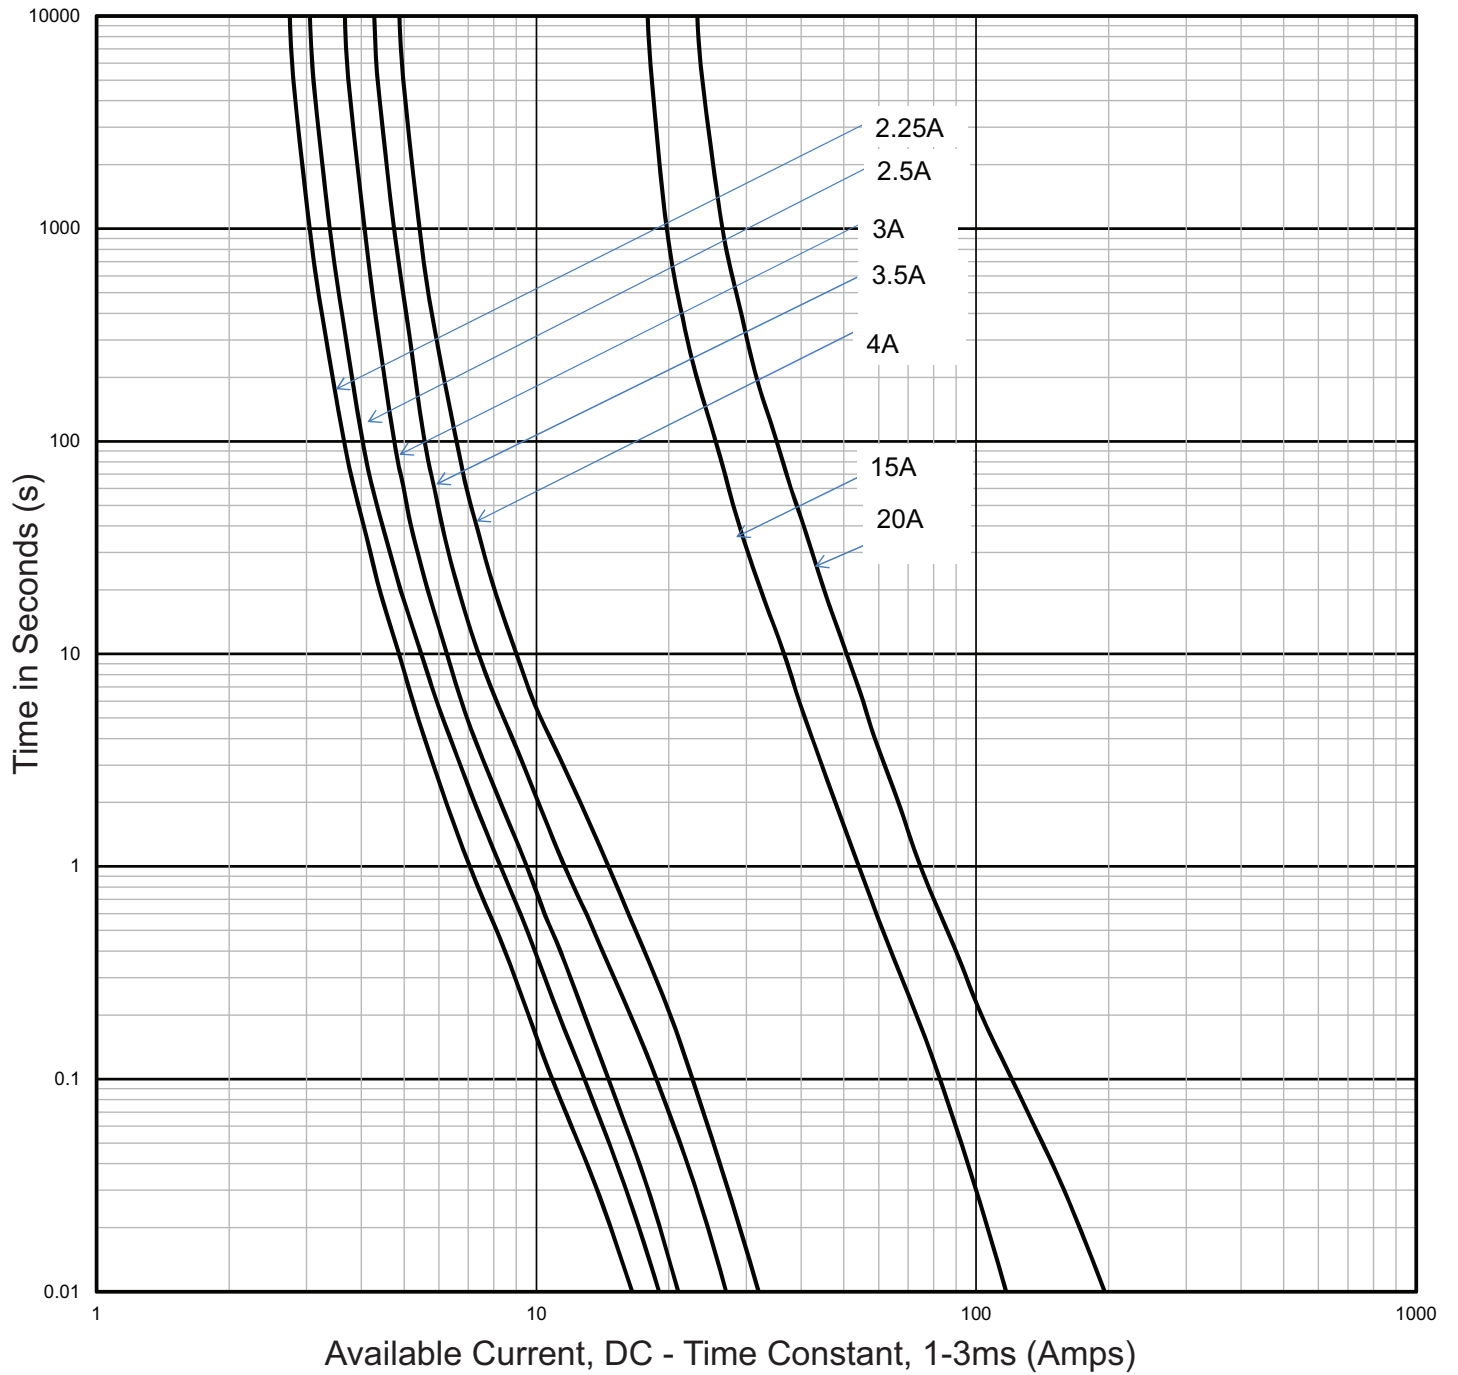

Recommended fuseclips:

Catalog number (max amps)	Description/data sheet no.
1A3400-09 (20 A)	PCB Fuseclips for PV-(amp)A14LF10F with 10 mm fixings no. 2131
1A3400-10 (30 A)	
1A3400-12 (15 A)	

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
Eaton.com

Bussmann Division
114 Old State Road
Ellisville, MO 63021
United States
Eaton.com/bussmannseries

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 1172 — BU-SB14108
January 2017

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

The CCC mark is administered by the Certification and Accreditation Administration of the People's Republic of China.

CSA is a registered trademark of the Canadian Standards Group.

IEC is a registered trademark of the International Electrotechnical Commission.

Sta-Kon is a registered trademark of Thomas & Betts.

UL is a registered trademark of the Underwriters Laboratories, Inc

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

Follow us on social media to get the latest product and support information.

