

Slow Blow Fuse

International
Standard Part


RoHS

ELV



SBFC-CT


Bolt type fuse

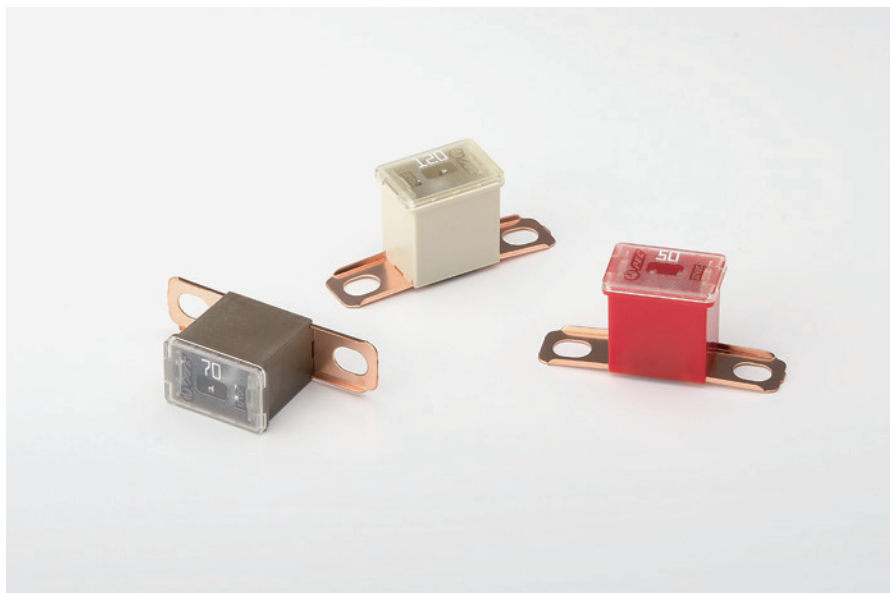

General Specification

Rated Voltage	DC32V
Breaking Capacity	1000A
Operation Temperature	-40°C~120°C
Standard	ISO8820-4
Country of Origin	Japan
Plating	—
Standard Packaging	500
Insertion Force	—
Extraction Force	—
Recommended Torque	4.5N±1

Dimensions

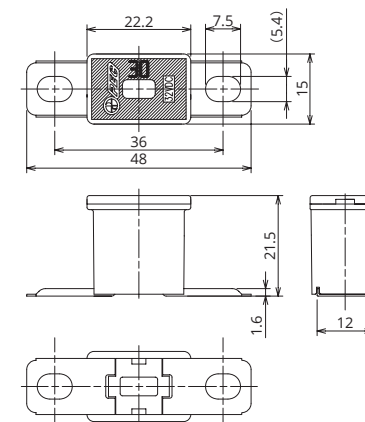

Product Lineup

Ampere Rating(A)	Part Number	Housing Colors	Resistance Value	Voltage Drop
30	3233	Pink	3.0 mΩ	105 mV
40	3243	Green	2.1 mΩ	105 mV
50	3253	Red	1.7 mΩ	96 mV
60	3263	Yellow	1.1 mΩ	74 mV
70	3273	Brown	1.0 mΩ	78 mV
80	3283	Black	0.63 mΩ	61 mV
100	3303	Blue	0.51 mΩ	65 mV
120	3323	White	0.42 mΩ	67 mV
140	3343	Maroon	0.36 mΩ	68 mV

Time-Current Characteristic

% of Ampere Rating(A)	Operating Time	
	Min	Max
110%	100hrs.	—
200%	5sec.	100sec.
350%	0.2sec.	7sec.
600%	0.04sec.	1sec.

*The fuse characteristic may change depending on the conditions of use.

Time-Current Characteristic Chart

